



complementary accessories

CABLE ENTRY MODULE FRONT OPENING

To be used as end or intermediate element in a suite of cabinets.
Front and/or rear access.

characteristics

• STRUCTURE

Manufactured from completely welded sheet steel with 1.8 mm uprights with rounded edges,
1.5 mm roof and bottom in box-type construction for higher stiffness.
Door manufactured from 2 mm sheet steel with vertical stiffening profiles.
Rear panel manufactured from 1.5 mm sheet steel.

paint finish

CE-TEK standard epoxy polyester powder coating.
Structure, door and rear panel: RAL 7032 textured finish.

composition

• structure


- door complete with \varnothing 3mm double bar locking system
- rear panel
- cable entry in roof and bottom.

protection degree




- IP 55.

To be ordered separately:

- lifting brackets LNSS-001 (see page 10)
- eyebolts WTGS-001 (see page 9).

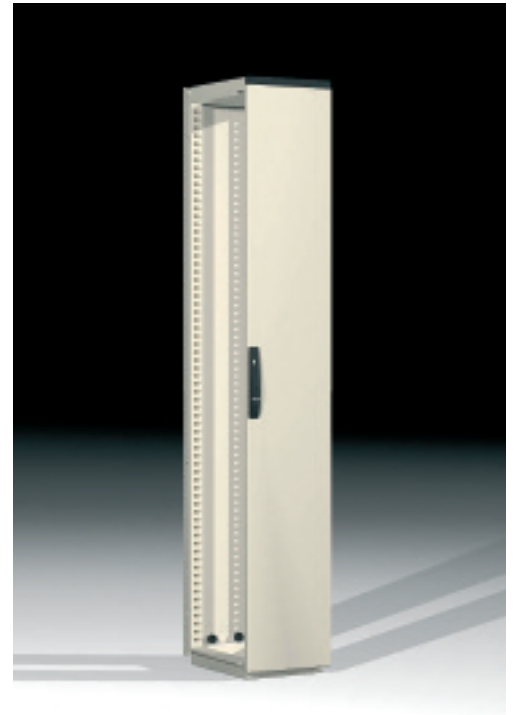

code		cabinet dimensions		H	I
mod.	art.	A	P		
CE2000	031804	1809	414	1700	300
	031805		514		400
	031806		614		500
CE2000	032004	2009	414	1900	300
	032005		514		400
	032006		614		500

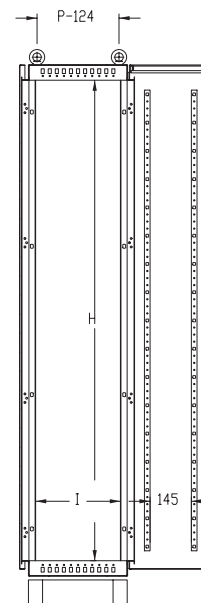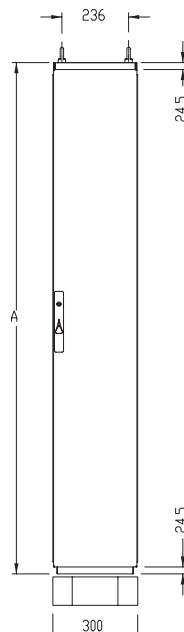

complementary accessories



STANDARD PLINTH: H=100 LNZ1 - H=200 LNZ2

characteristics

Corners made of pressed sheet steel thickness 25/10.

Cross channels made of pressed sheet steel thickness 20/10.

paint finish

CE-TEK standard epoxy polyester powder coating.


Colour: RAL 7025 textured finish.

composition

- 4 corners
- cross channels.

plinth

code		cabinet dimensions		plinth	
mod.	art.	width	depth	B	P
LNZ1 (h=100)	030040	300	414	300	350
	030050		514		450
	030060		614		550
	060040	600	414	600	350
	060050		514		450
	060060		614		550
LNZ2 (h=200)	080040	800	414	800	350
	080050		514		450
	080060		614		550
	100040	1000	414	1000	350
	100050		514		450
	100060		614		550
120040	1200	414	1200	350	
120050		514		450	
120060		614		550	

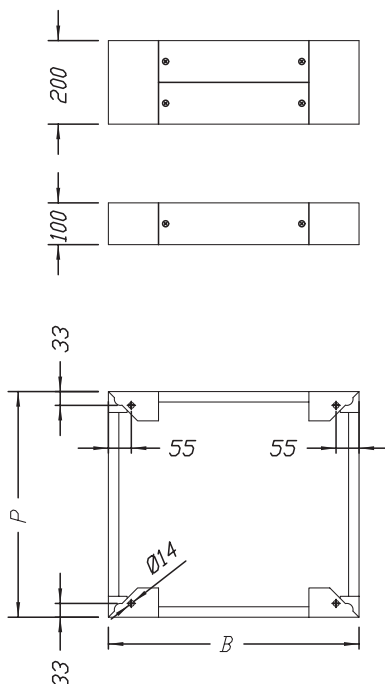

complementary accessories

WATERTIGHT PLINTH H=200 LNZ3

Mainly used as gallery for the passage of cables, to protect them from accidental impact and aggressive agents.

characteristics

2 mm pressbent and welded sheet steel.

paint finish

CE-TEK standard epoxy polyester powder coating.
Colour: RAL 7025 textured finish.


composition

- plinth without covers
- adhesive seal
- mounting accessories.

watertight plinth

code		cabinet dimensions		plinth	
mod.	art.	width	depth	B	A
LNZ3	060040	600	414	600	378
	060050		514		478
	060060		614		578
	080040	800	414	800	378
	080050		514		478
	080060		614		578
	100040	1000	414	1000	378
	100050		514		478
	100060		614		578
	120040	1200	414	1200	378
	120050		514		478
	120060		614		578

Remark: to be ordered separately two side covers.

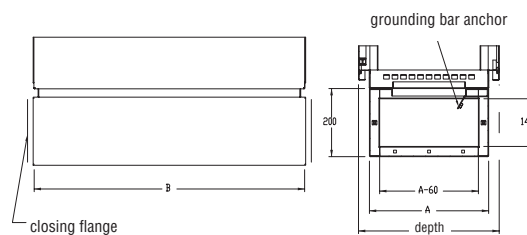


TWO CLOSING FLANGES LNFL

composition

- two flanges with seal
- mounting accessories.

code		cabinet depth
mod.	art.	
LNFL	000400	414
	000500	514
	000600	614

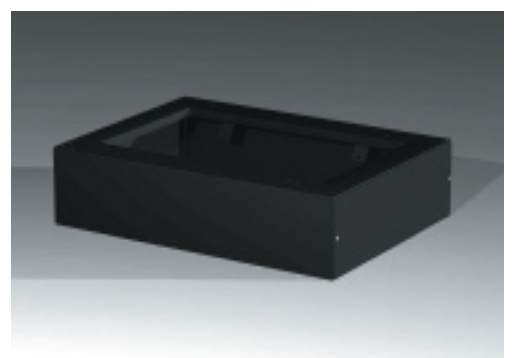

complementary accessories



FRONT INSERTED MOUNTING PLATE ATPA

- Sendzimir sheet steel
- 2.5mm thickness for $L < 1000$
 - 3mm thickness for $L \geq 1000$.




mounting plate

code		cabinet dimensions		mounting plate	
mod.	art.	B	A	L	H
ATPA	060180	600	1809	485	1680
	060200		2009		1880
	080180	800	1809	685	1680
	080200		2009		1880
	100180	1000	1809	885	1680
	100200		2009		1880
	120180	1200	1809	1085	1680
	120200		2009		1880

THE PLATE IS INCLUDED IN THE SUPPLY.

To be ordered separately:

- plate mounting accessories, code: WTKB-002
- available on request: WTSC-001 (see 'CE1000 complementary accessories').

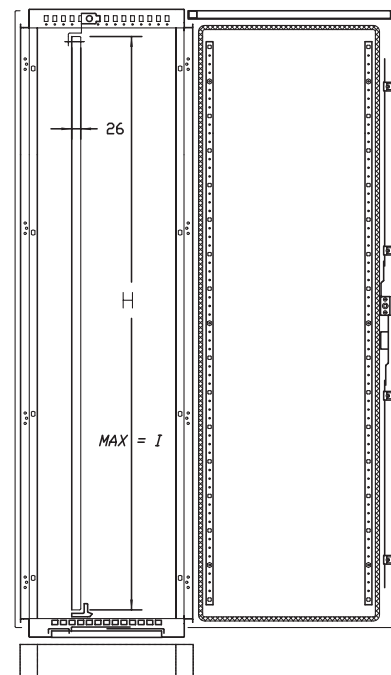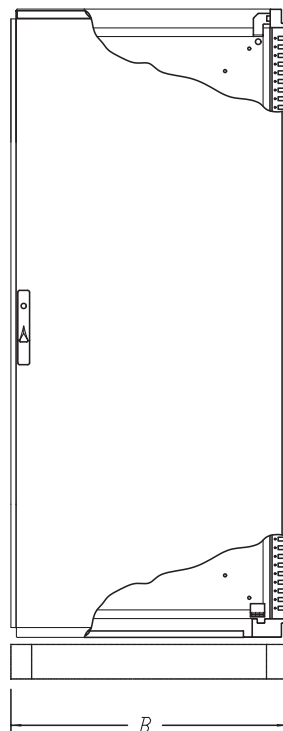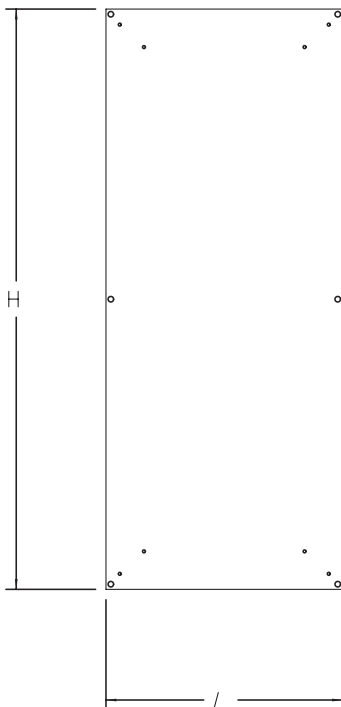

I = 300 - 400 - 500

complementary accessories

INTERMEDIATE PLATE ATPN

To give continuity to mounting plates between cabinets mounted in a suite.

characteristics



2.5 mm pressbent sendzimir sheet steel.

composition

Supply includes mounting accessories.

intermediate plate

code		cabinet height	A
mod.	art.		
ATPN	001800	1800	1686
	002000	2000	1886

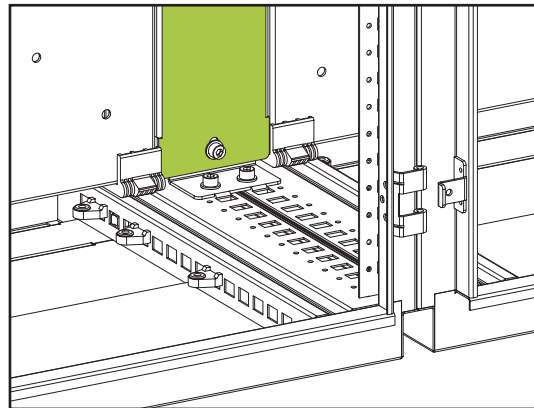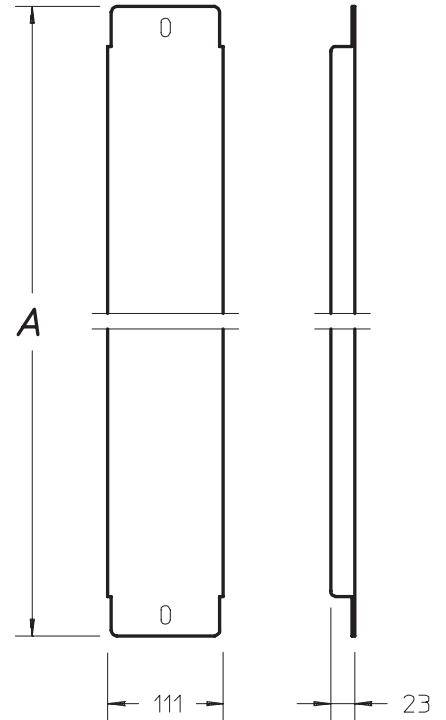

SUPPLEMENTARY MOUNTING PLATE ATPS

It is applied on the rear part of mounting plates to obtain a double mounting surface.

characteristics


2.5 mm sendzimir sheet steel.

composition

Supply includes mounting accessories.

supplementary mounting plate

code		cabinet dimensions		mounting plate	
mod.	art.	width	height	L	H
ATPS	060180	600	1809	480	1670
	060200		2009		1870
	080180	800	1809	680	1670
	080200		2009		1870
	100180	1000	1809	880	1670
	100200		2009		1870

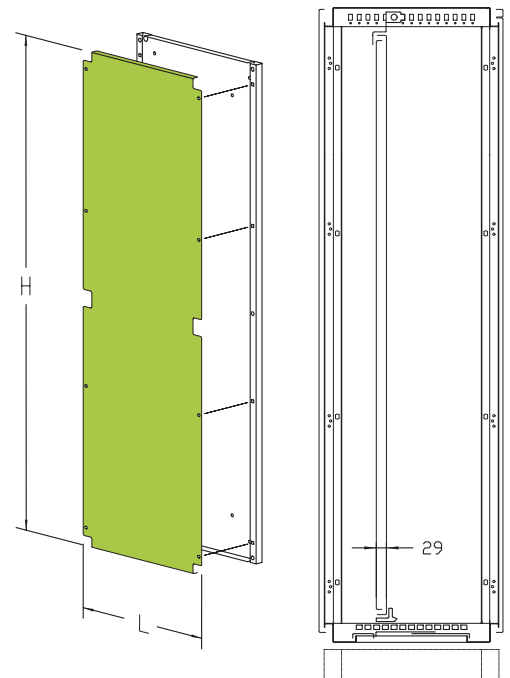

complementary accessories






SIDE INSERTED MOUNTING PLATE ATPL

Manufactured from 2.5mm sendzimir sheet steel.

Supply includes sliding guides and mounting accessories.

mounting plate

code		cabinet dim.		mounting plate	
mod.	art.	B	A	L	H
ATPL	060180	600	1809	600	1685
	060200		2009		1885
	080180	800	1809	800	1685
	080200		2009		1885
	100180	1000	1809	1000	1685
	100200		2009		1885
	120180	1200	1809	1200	1685
	120200		2009		1885

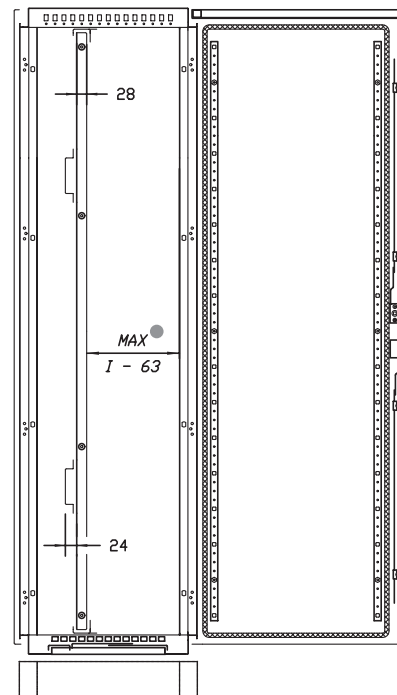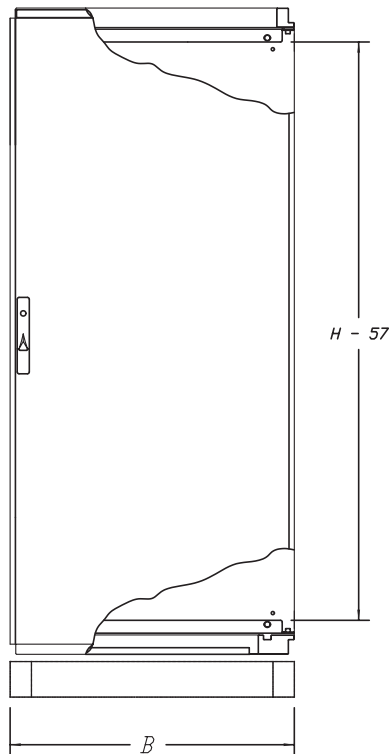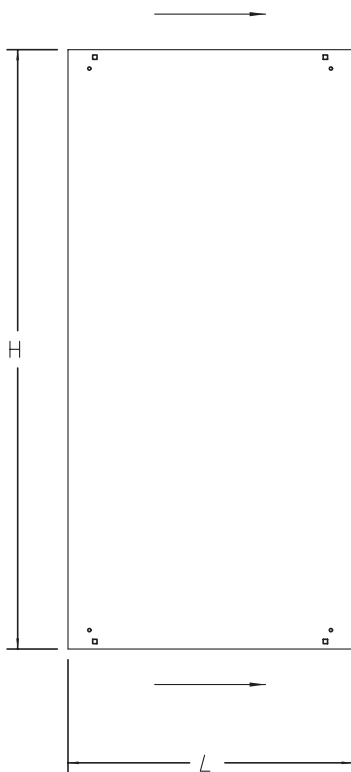

Stiffening omega: accessories sold separately with 3 m maximum length.

● Calculated without stiffening omega.



complementary accessories

BLANK DOOR LNPO

Manufactured from 2 mm pressbent sheet steel.

paint finish


CE-TEK standard epoxy polyester powder coating. Colour: RAL 7032 textured finish.

composition

- two upright rails complete with accessories
 - door complete with sealing gasket
 - Ø 3mm double bar locking system
 - two vertical stiffening profiles
 - finishing profiles RAL 7025.

code		cabinet dim.	
mod.	art.	A	B
LNPO	060180	1809	600
	080180		800
	100180		1000
	120180		1200
	060200	2009	600
	080200		800
	100200		1000
	120200		1200

Remark: to be ordered separately mounting accessories LNAP-001 (single door), LNAP-002 (double door).

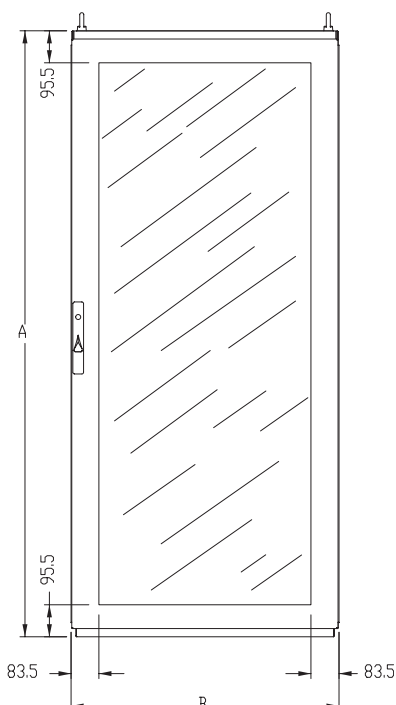

GLAZED DOOR LNPX

Manufactured from 2 mm sheet steel with tubular stiffening frame.

4 mm transparent plexiglas sheet.

paint finish

CE-TEK standard epoxy polyester powder coating.

Door RAL 7032 textured finish.

supply includes

- door complete with sealing gasket
- Ø 3mm double bar locking system
 - tubular stiffening frame
 - finishing profile RAL 7025.

code		cabinet dim.	
mod.	art.	A	B
LNPIX	060180	1809	600
	080180		800
	100180		1000
	060200		2009
	080200	800	
	100200	1000	



complementary accessories



SIDE PANELS LNFI

Manufactured from 1.5 mm pressbent sheet steel.

paint finish


CE-TEK standard epoxy polyester powder coating. Colour: RAL 7032 textured finish.

composition

- two side panels
- quick fastening couplers
- nuts and bolts
- supply includes 2 pieces.

side panels

code		cabinet dimensions	
mod.	art.	height	depth
LNFI	040180	1800	400
	040200	2000	400
	050180	1800	500
	050200	2000	500
	060180	1800	600
	060200	2000	600

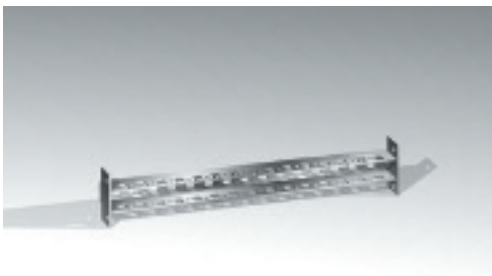

PROFILES H 30mm LNPR

Manufactured from 2mm sendzimir sheet steel drilled at regular 30mm spacing. They are applied along the depth of the structure to improve its stiffness.

composition

Supply includes 2 pieces complete with mounting hardware.

profiles H 30mm

code		cabinet dim.	profile length
mod.	art.		
LNPR	030040	400	300
	030050	500	400
	030060	600	500




complementary accessories

JOINING KIT LNKU

To be used to join two cabinets together.
It is recommended to use lifting brackets WTSS-001 instead of eyebolts.


composition

Supply includes sealing gasket and mounting hardware to join the cabinets at eight locations, ensuring IP protection degree.

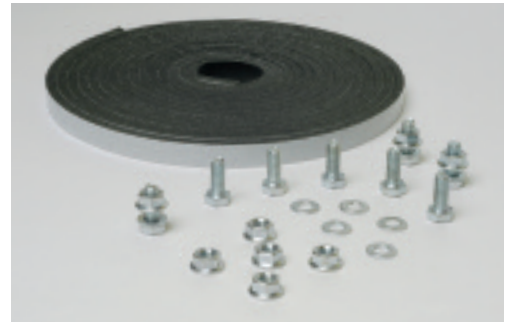

joining kit

code		cabinet height
mod.	art.	
LNKU	002	1800
		2000

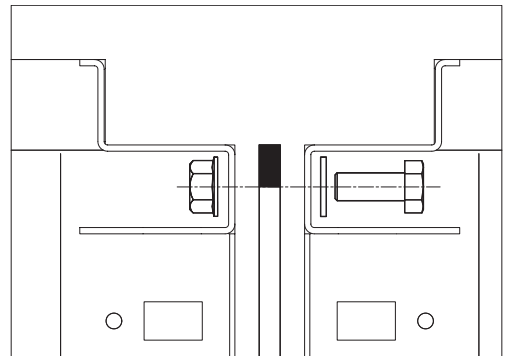


REINFORCING BRACKETS ATKU-003

characteristics

Manufactured from 4 mm zinc passivated sheet steel, it can be used to increase the stiffness of cabinets joined in a suite.

composition

Supply includes 4 pieces complete with mounting accessories.

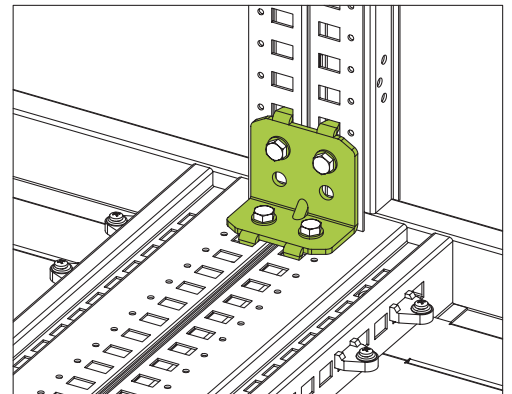

EYEBOLTS WTGS-001

composition

Supply includes 4 pieces.





complementary accessories




LIFTING BRACKETS LNSS-001

Manufactured from 5 mm zinc passivated sheet steel.

composition

Supply includes 4 pieces.

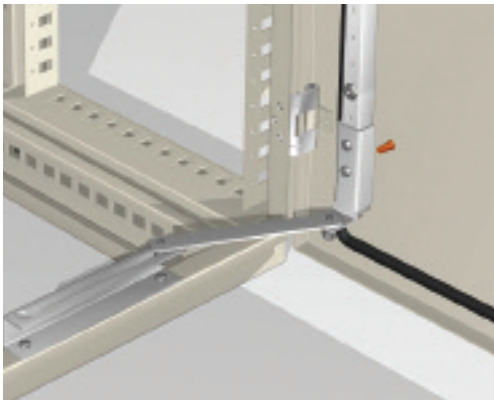

DOOR STOP LNFP-001

It holds the door open at 90° avoiding accidental closing.

Manufactured from 2.5 mm zinc passivated sheet steel, complete with accessories.

composition

Supply includes 1 piece.




180° DOOR HINGES LNCE-180001

Hinges for 180° opening to be mounted on standard doors, complete with mounting accessories.

composition

Supply includes 4 pieces.






complementary accessories

MICROSWITCH WI-100LN

Complying with standards IEC 337-VDE 0660.

composition
Supply includes: microswitch, support, mounting bracket and screws.
conformity and approval

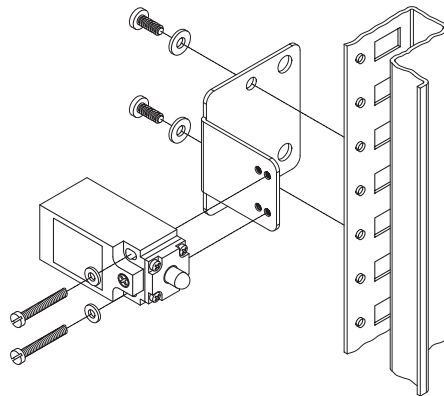

THREE-PHASE FLASHING SAFETY LIGHT WI-105LN


This device detects and signals the power supply status of the electric panel.
It is connected directly after the main switch and located to be clearly visible while opening the door.
The blinking lights indicate a hazardous situation due to live voltage.

composition
• metal mounting bracket
• flashing light
• interlocking limit switch with NC contact for auxiliary circuits

conformity and approval



UPON REQUEST, A NO CONTACT WI 107 CAN BE SUPPLIED SEPARATELY.

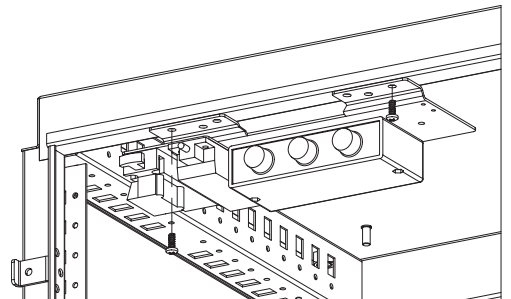

WA-218

Zinc passivated self-threading screws Ø 5.5x13.

composition
Supply includes 50 pieces.

