



### Characteristics

Enclosure manufactured from 1.5mm sheet steel.  
 Door manufactured from 1.5mm sheet steel up to 800mm height then 2mm sheet steel.  
 Mounting plate manufactured from 2.5mm sendzimir sheet steel.  
 3mm transparent plexiglas sheet.

### Paint finish

CE-TEK standard epoxy polyester powder coating.  
 Enclosure and door RAL 7032 textured finish.

### Supply includes



- box
- mounting plate
- gland plate with sealing gasket
- $\varnothing$  3mm double bar key
- screws for earthing
- mounting accessories.

### Conformity and approval



### Protection degree

- IP 55 complying with EN50298; EN60529
- type 12 complying with UL508A; UL50
- impact resistance IK10 complying with EN500298; EN50102.

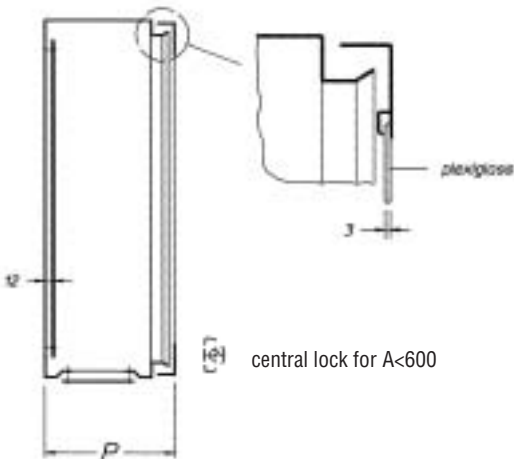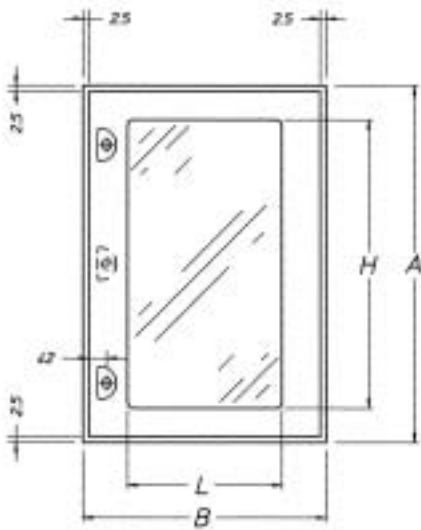

| code   |      | B   | A    | L   | H    | P   |
|--------|------|-----|------|-----|------|-----|
| mod.   | art. |     |      |     |      |     |
|        | 320  | 400 | 300  | 260 | 185  | 200 |
| CESTP4 | 420  | 400 | 400  | 260 | 285  | 200 |
| CESTP4 | 520  | 400 | 500  | 260 | 385  | 200 |
| CESTP4 | 525  | 400 | 500  | 260 | 385  | 250 |
| CESTP4 | 620  | 400 | 600  | 260 | 485  | 200 |
| CESTP4 | 625  | 400 | 600  | 260 | 485  | 250 |
| CESTP5 | 720  | 500 | 700  | 360 | 585  | 200 |
| CESTP5 | 725  | 500 | 700  | 360 | 585  | 250 |
| CESTP6 | 420  | 600 | 400  | 460 | 285  | 200 |
| CESTP6 | 430  | 600 | 400  | 460 | 285  | 300 |
| CESTP6 | 620  | 600 | 600  | 460 | 485  | 200 |
| CESTP6 | 630  | 600 | 600  | 460 | 485  | 300 |
| CESTP6 | 825  | 600 | 800  | 460 | 685  | 250 |
| CESTP6 | 830  | 600 | 800  | 460 | 685  | 300 |
| CESTP6 | 1025 | 600 | 1000 | 460 | 885  | 250 |
| CESTP6 | 1030 | 600 | 1000 | 460 | 885  | 300 |
| CESTP6 | 1230 | 600 | 1200 | 460 | 1085 | 300 |
| CESTP8 | 1030 | 800 | 1000 | 660 | 885  | 300 |
| CESTP8 | 1230 | 800 | 1200 | 660 | 1085 | 300 |