

Cerca / Cerca-plus

The universal control enclosure in a trendsetting design

Particularly suited as an enclosure for measurement and control applications in all branches of industry.

Ingress protection up to IP 65, depending on the respective version, CSA-tested enclosures on request.

The most up-to-date hinge technology for the clear, lockable lid, recessed fronts to accept membrane keypads, and the possibility to mount an aluminium front panel make the Cerca range a highly flexible enclosure system.

Cerca +



Wall enclosure in shock-resistant polystyrene. Ideal for use as a measurement and control enclosure, with slots for printed circuit board insertion.

Features: Large terminal compartment which can be lead-sealed. Novel, robust hinge technology - the hinge side can be changed, the snap lock can also be lead-sealed.
 100 version: open, with cover frame,
 100 F version: with closed membrane front
 1000 version: with clear lid in polycarbonate



Colour: light grey, similar to RAL 7035


Model	Order No.	Features	Protection	Dimensions		
				L	W	H
RCP130	41130000	with cover frame	IP 40	186	131	81
RCP130F	41130600	with membrane front	IP 65	186	131	82,5
RCP1300	41130100	with hinged lid, snap lock	IP 65	186	131	103
RCP160	41160000	with cover frame	IP 40	161	166	71
RCP160F	41160600	with membrane front	IP 65	161	166	72,5
RCP1600	41160100	with hinged lid, snap lock	IP 65	161	166	93
RCP170	41170000	with cover frame	IP 40	161	166	99
RCP170F	41170600	with membrane front	IP 65	161	166	100,5
RCP1700	41170100	with hinged lid, snap lock	IP 65	161	166	121
RCP200	41200000	with cover frame	IP 40	185	213	82,5
RCP200F	41200600	with membrane front	IP 65	185	213	84
RCP2000	41200300	with hinged lid, snap lock	IP 65	185	213	104,5
RCP250	41250000	with cover frame	IP 40	217	257	110,5
RCP250F	41250600	with membrane front	IP 65	217	257	112
RCP2500	41250100	with hinged lid, snap lock	IP 65	217	257	132,5
RCP310	41310000	with cover frame	IP 40	261	296	110,5
RCP310F	41310600	with membrane front	IP 54	261	296	112
RCP3100	41310100	with hinged lid, snap lock	IP 65	261	296	132,5
RCP350	41350000	with cover frame	IP 40	281	296	136
RCP350F	41350600	with membrane front	IP 54	281	296	137,5
RCP3500	41350100	with hinged lid, snap lock	IP 65	281	296	158
RCP400	41400000	with cover frame	IP 40	319	363	128,5
RCP400F	41400600	with membrane front	IP 54	319	363	130,5
RCP4000	41400100	with hinged lid, snap lock	IP 65	319	363	150

Enclosures in special material (UL 94 VO) and special colours on request.
 CSA-tested enclosures on request.

All dimensions in mm

Cerca +

- Accessories -

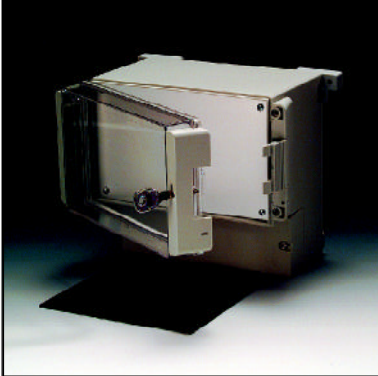

- M mounting plate, laminated paper (Pertinax)
- FAE front panel, anodized aluminium
- SHLO-302 cylinder lock, can be retro-fitted in the snap lock.
- RCP -HK hand latch, can be retro-fitted in the snap lock.

Model	Order No.	Features
SHLO-302	21008310	cylinder lock
RCP -HK	41002501	hand latch
RCP-WL	41000300	wall brackets, suitable for all RCP sizes, packing unit = 2 pcs
RCP - 130 M	41000350	mounting plate 2 mm thick
RCP - 160/170 M	41000400	mounting plate 2 mm thick
RCP - 200 M	41000500	mounting plate 2 mm thick
RCP - 250 M	41000600	mounting plate 2 mm thick
RCP - 310/350 M	41000700	mounting plate 2 mm thick
RCP - 400 M	41000800	mounting plate 2 mm thick
FAE 130	27000100	front panel, anodized aluminium 1 mm thick
FAE 160/170	27000300	front panel, anodized aluminium 1 mm thick
FAE200	27000500	front panel, anodized aluminium 1 mm thick
FAE250	27000700	front panel, anodized aluminium 1 mm thick
FAE 310/350	27000900	front panel, anodized aluminium 1 mm thick
FAE400	27120000	front panel, anodized aluminium 1.5 mm thick